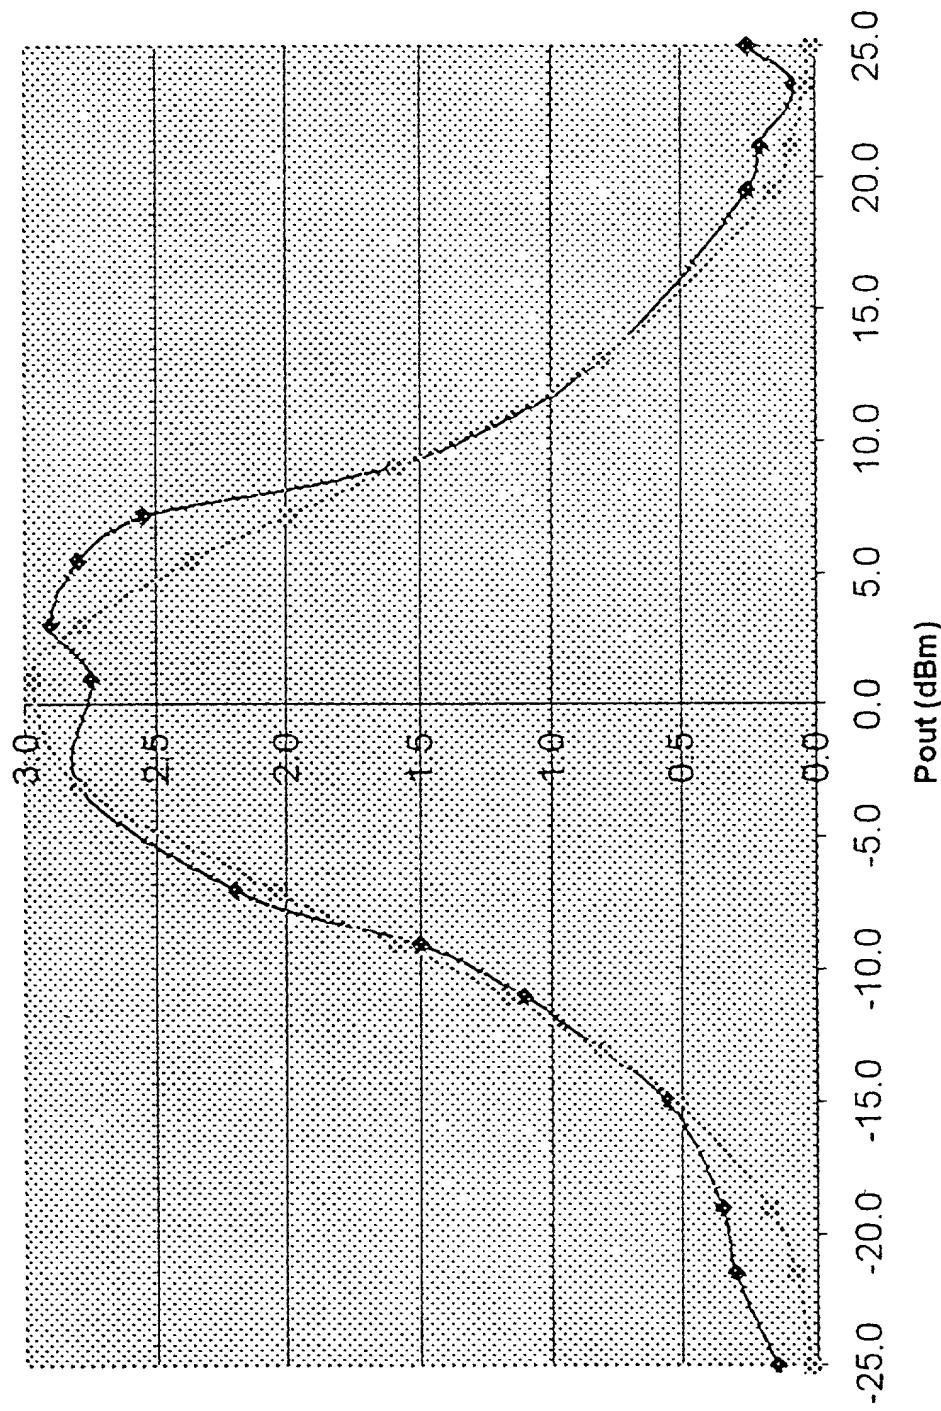


Figure 1



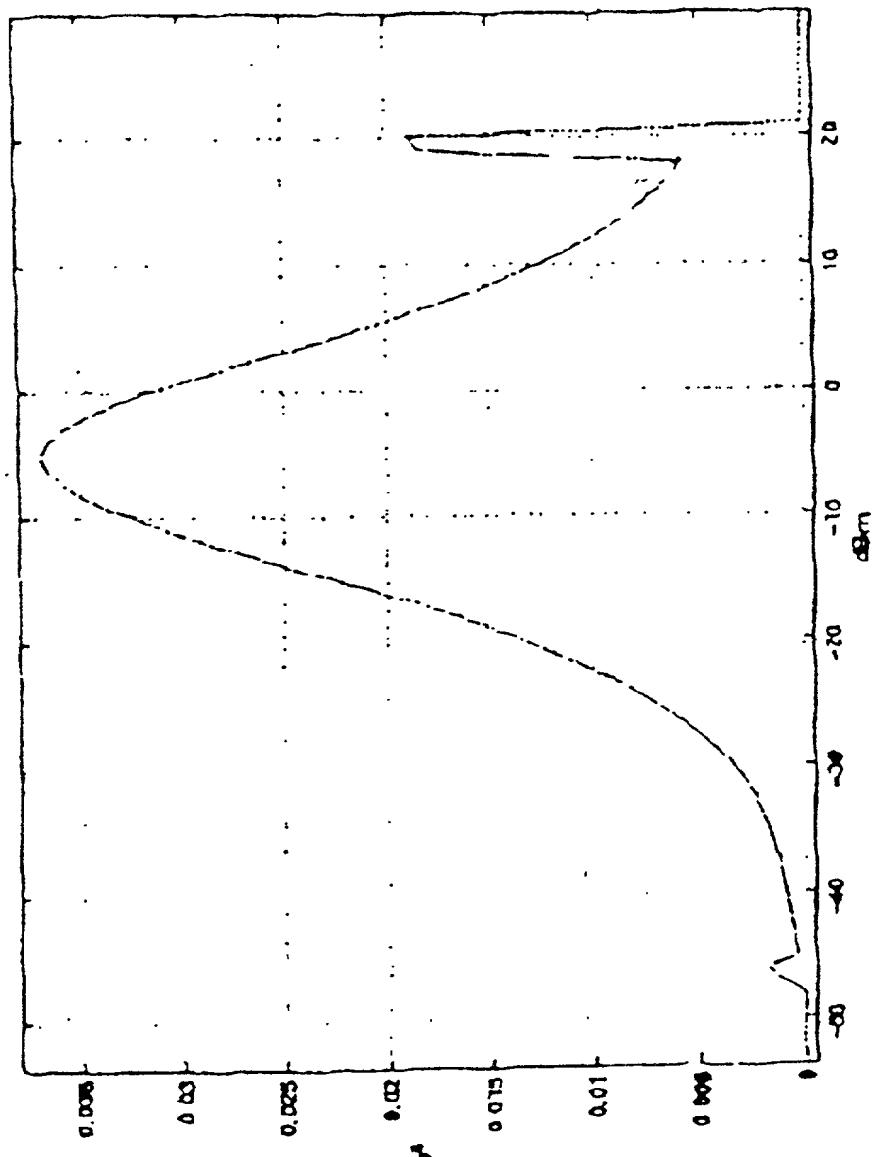


Figure 2

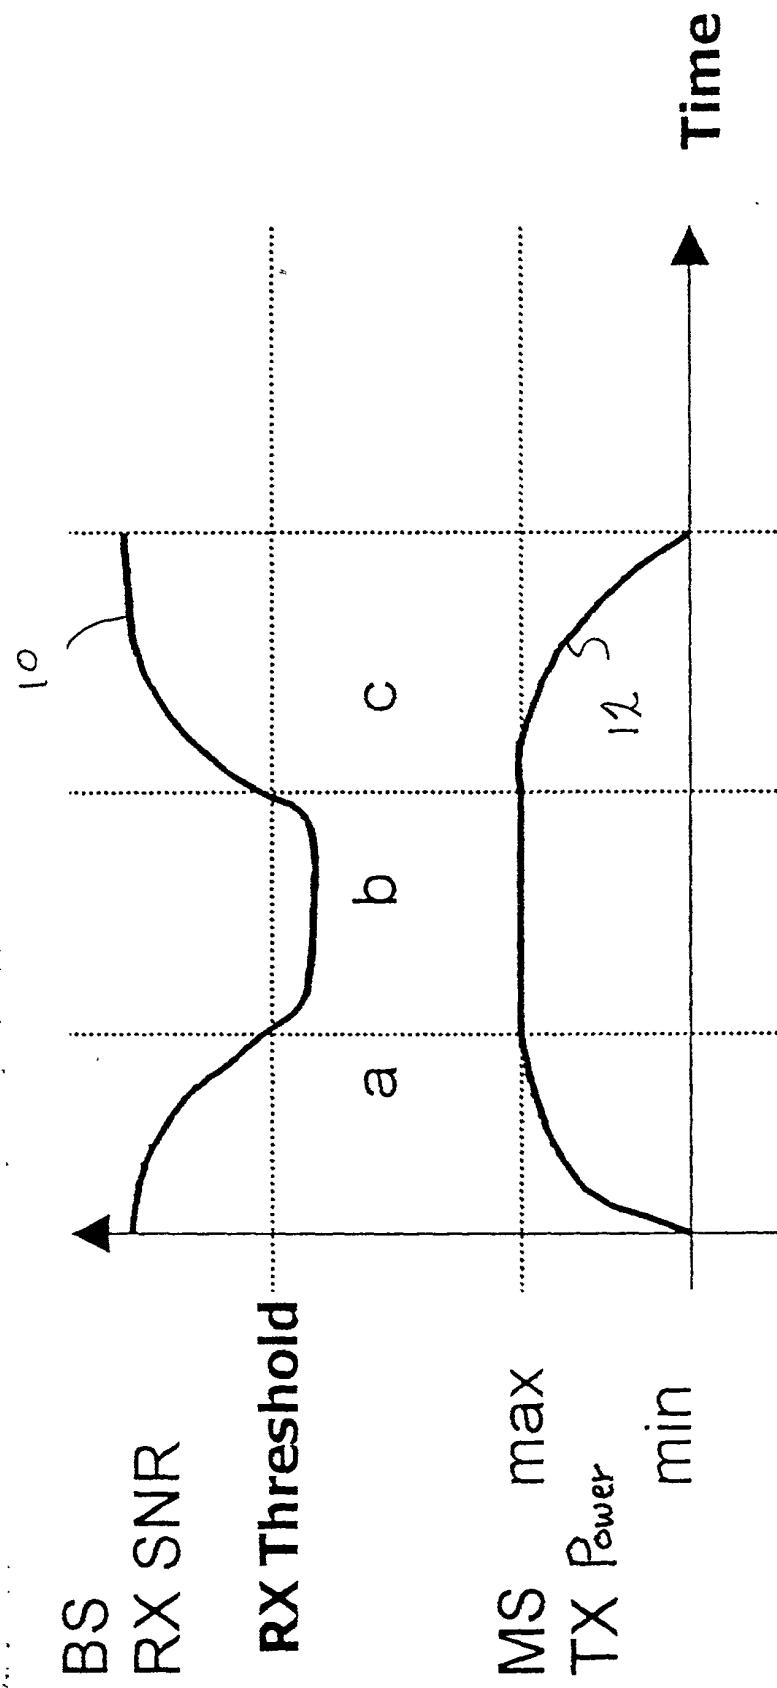


Figure 3

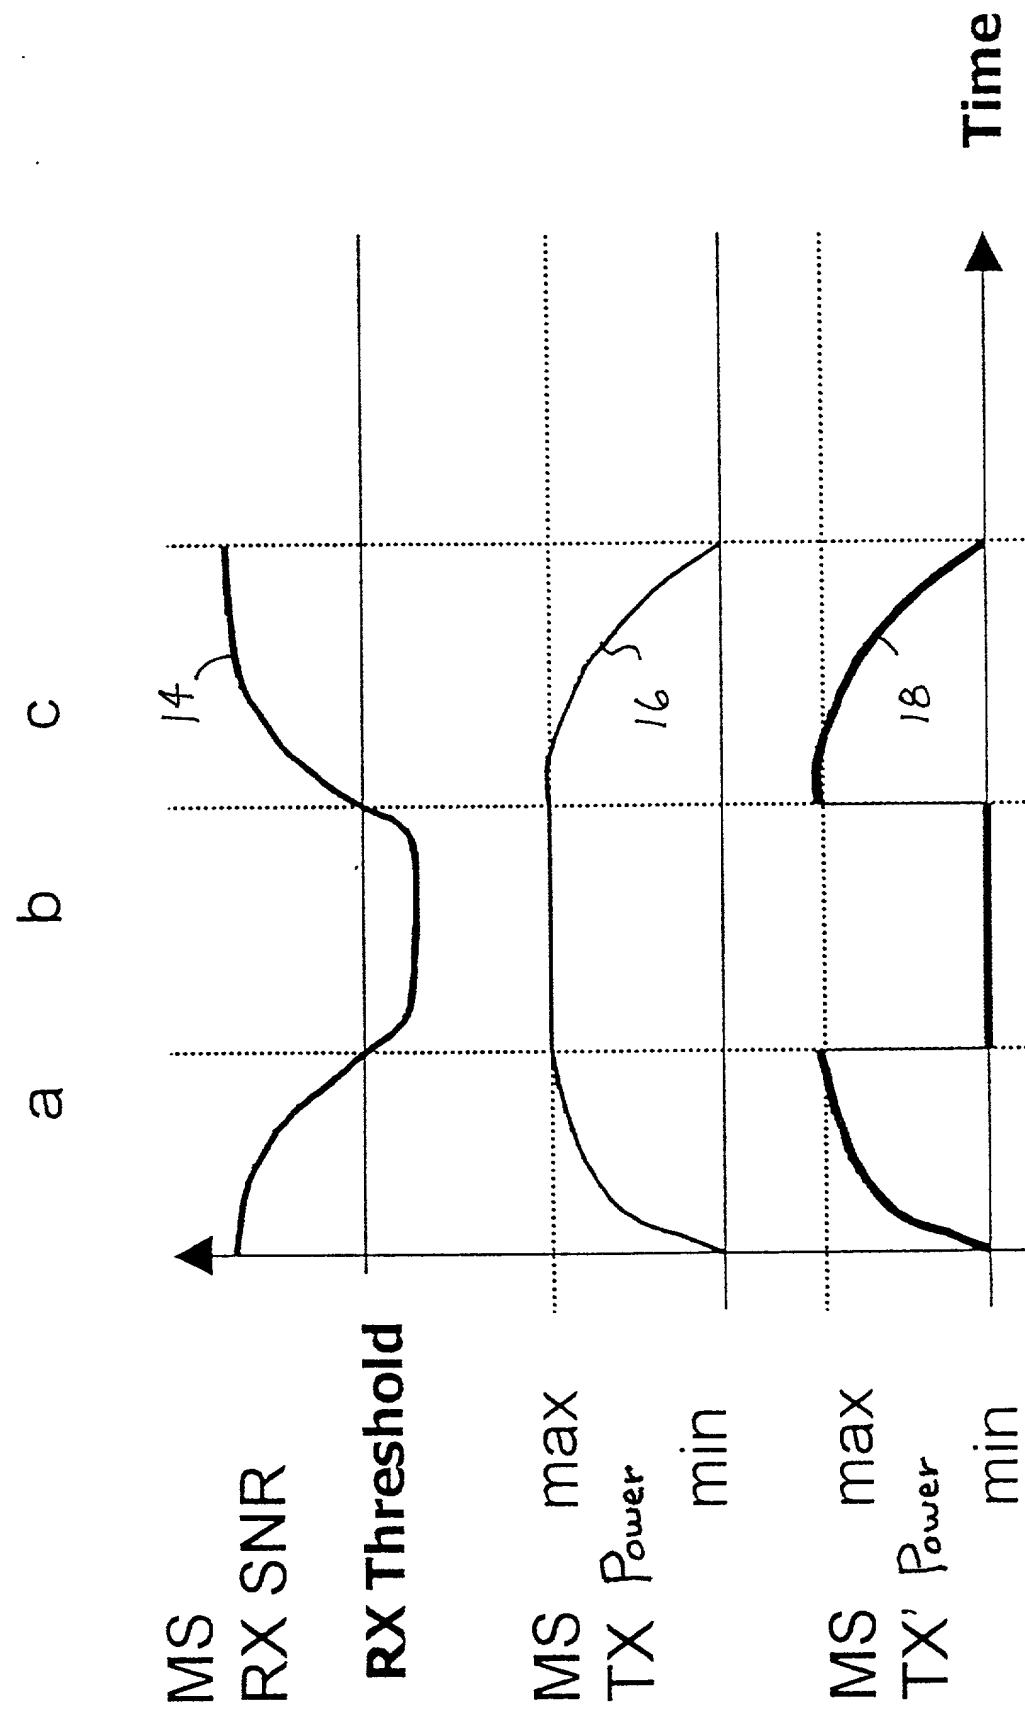


Figure 4

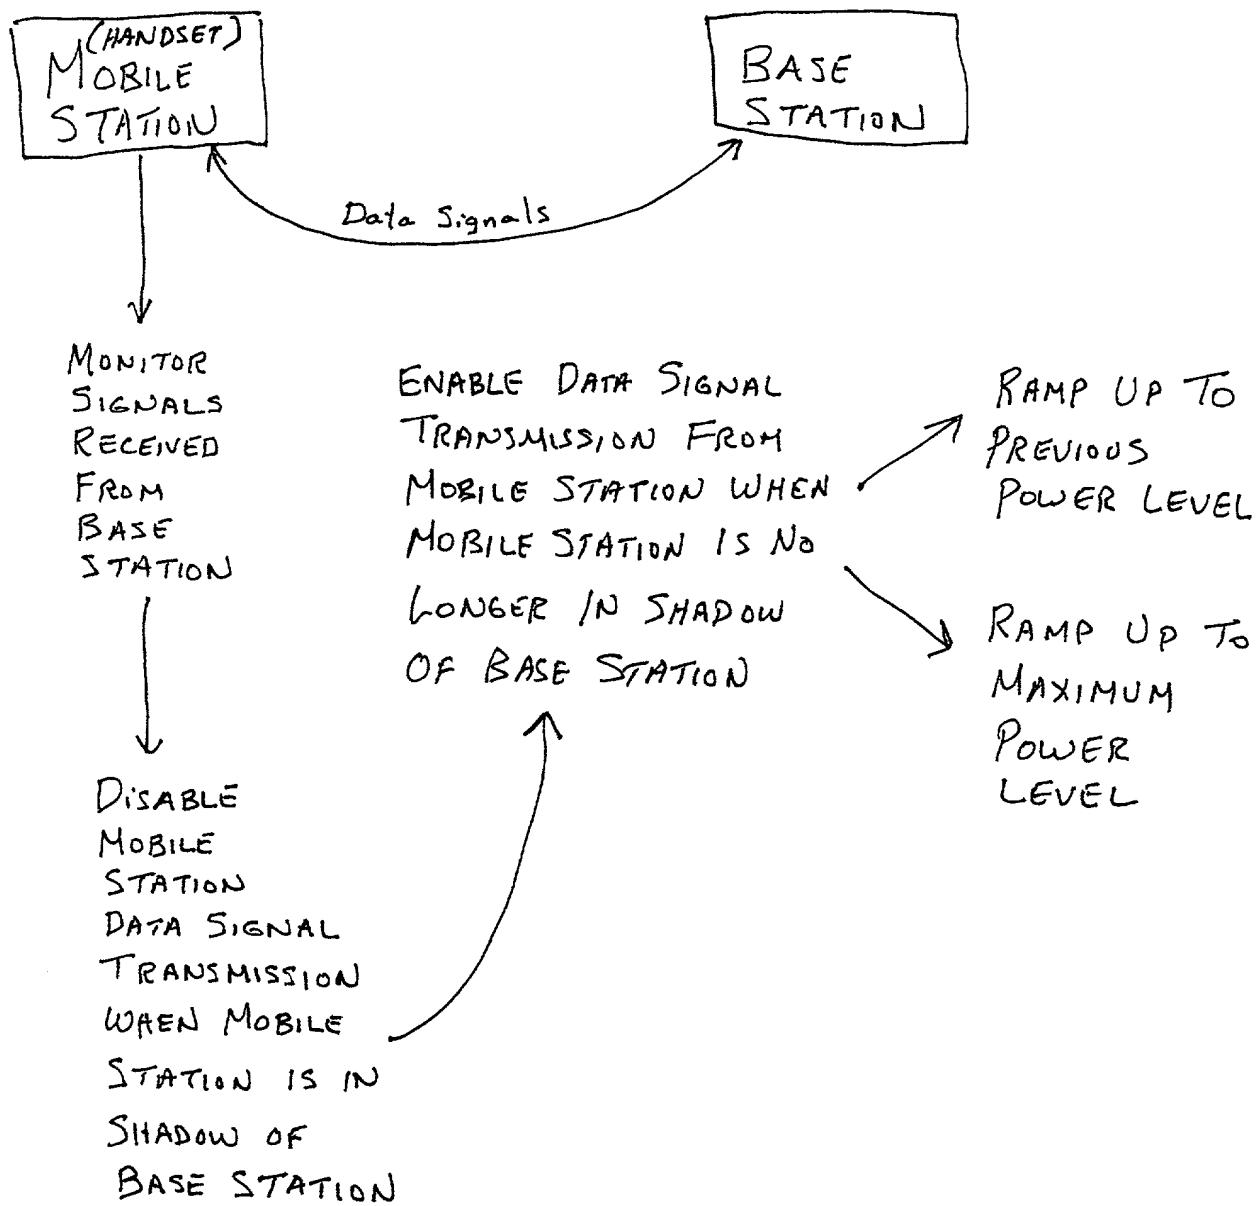


FIGURE 5


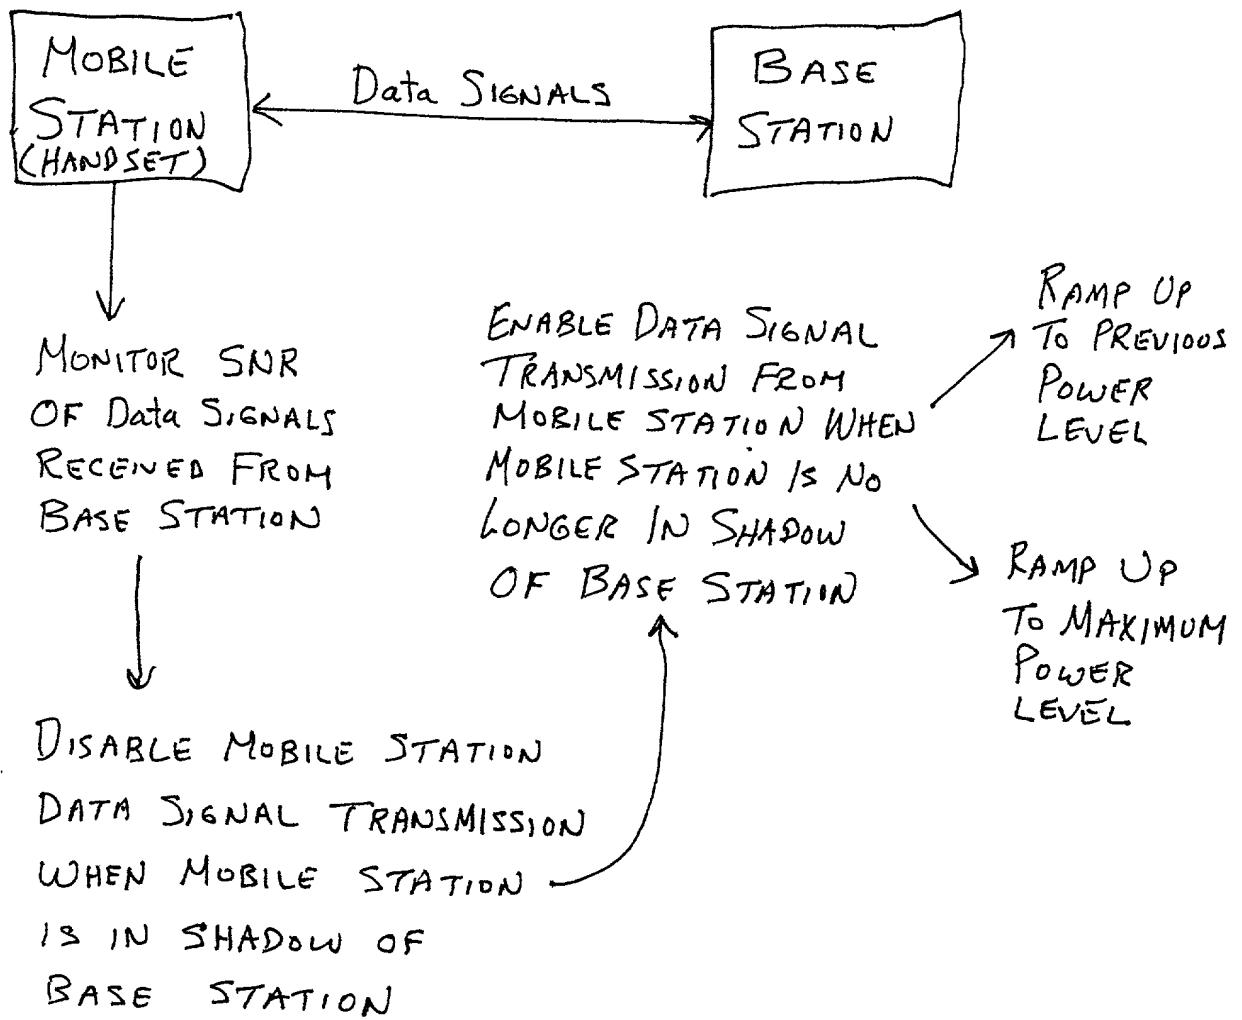


FIGURE 6

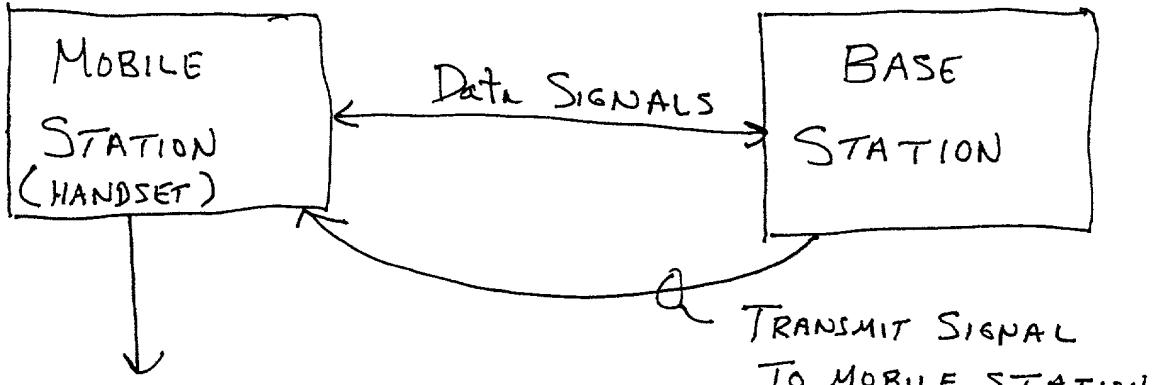

DISABLE Data SIGNAL
TRANSMISSION FROM
MOBILE STATION WHEN


MOBILE STATION IS IN
SHADOW OF BASE STATION

TRANSMIT SIGNAL
TO MOBILE STATION
INDICATING LOSS OF
PRIMARY FINGERS
IS IN SHADOW
OF BASE STATION

ENABLE DATA SIGNAL
TRANSMISSION FROM
MOBILE STATION WHEN
MOBILE STATION IS NO
LONGER IN SHADOW

RAMP UP TO PREVIOUS
POWER LEVEL
RAMP UP TO MAXIMUM
POWER LEVEL

FIGURE 7

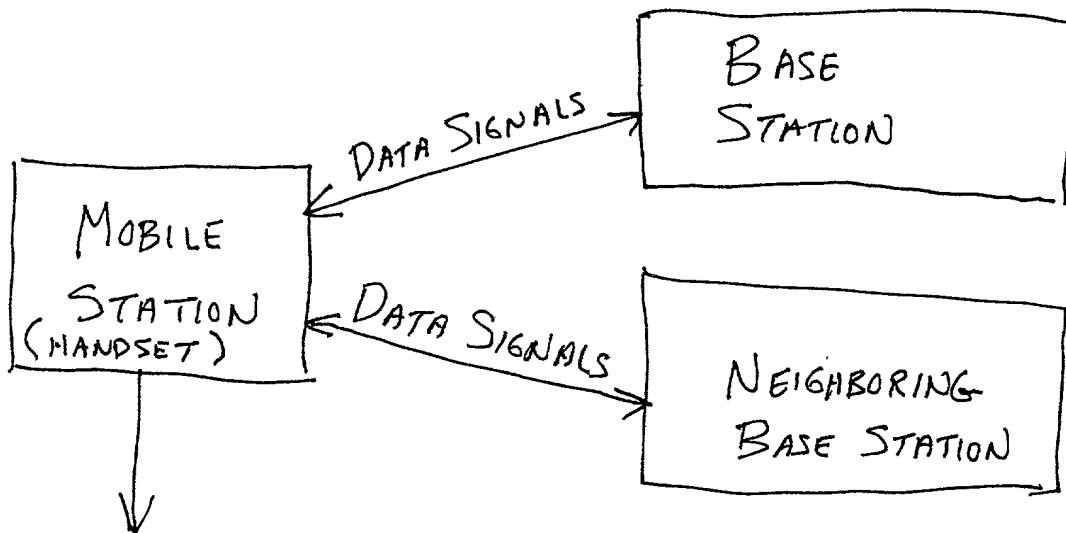

COMPARE DATA SIGNAL

DELAYS BETWEEN DATA

SIGNALS RECEIVED FROM

BASE STATION AND

NEIGHBORING BASE STATION



DISABLE DATA SIGNAL


TRANSMISSION FROM

MOBILE STATION WHEN

MOBILE STATION IS IN

SHADOW OF BASE STATION

ENABLE DATA SIGNAL
TRANSMISSION FROM
MOBILE STATION WHEN
MOBILE STATION IS NO
LONGER IN SHADOW



RAMP UP TO
PREVIOUS
POWER LEVEL

RAMP UP TO
MAXIMUM
POWER LEVEL

FIGURE 8

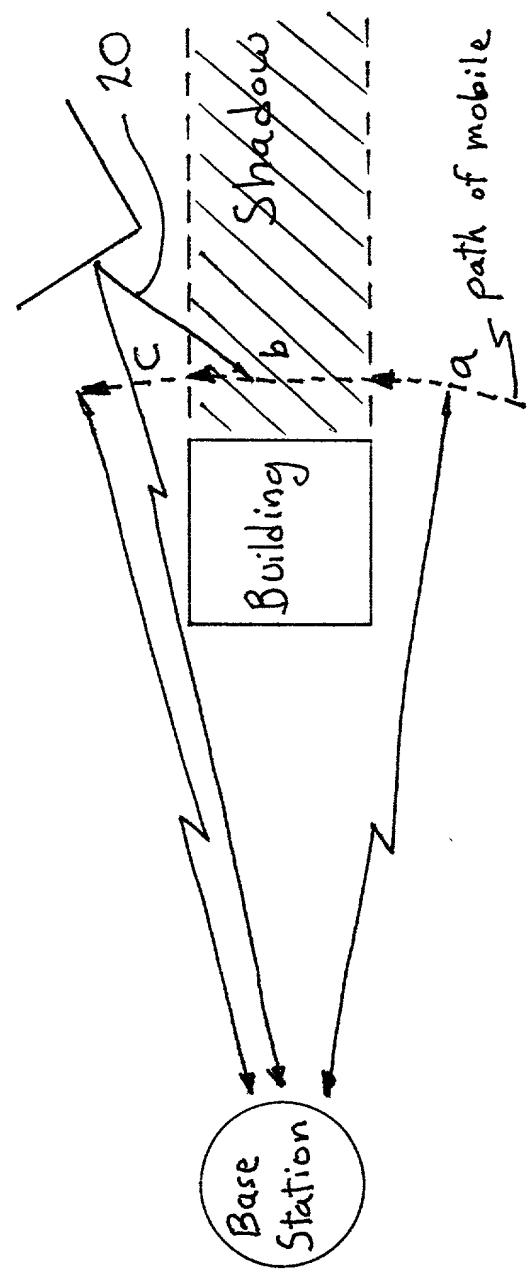


Figure 9